




## AMS 100 - SINGLE-PHASE AUTOTRANSFORMER 230-400V - 100VA - IP00

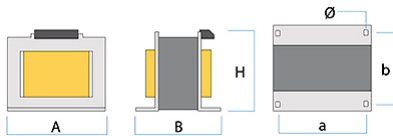

SKU: 41181  
 Référence technique: 43R18

### CARACTÉRISTIQUES TECHNIQUES:

Type : Autotransformer  
 Current : single-phase  
 Certification(s) : EN 61558-2-13  
 Power : 100 VA  
 Primary voltage : 230-400V reversible  
 Secondary voltage : 230-400V reversible  
 :  
 Protection : IP00  
 Version : standard  
 Inrush current : less than or equal to 11 In  
 Heatings : B (IEC 60085)  
 Max. ambient T° : 35°C  
 No load losses : 3,3 W  
 Load losses : 5,5 W  
 Voltage drop : 5,2 %  
 UCC : 4,1 %  
 Efficiency : 91,9 %

### DIMENSIONS:

Dimensions (A x B x H) : 78 x 85 x 79 mm  
 Mounting centres (a x b) : 58 x 52 mm  
 Mounting diameter (Ø) : 6,5x10 mm  
 Weight : 1,3 kg

### PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 0,5A  
 Primary 230V (D circuit breaker) : 1 x 1A  
 Primary 400V (aM fuse(s)) : 1 x 0,25A  
 :  
 Secondary 230V (gG fuse(s)) : 1 x 0,5A  
 Secondary 230V (C circuit breaker(s)) : 1 x 1A  
 Secondary 400V (gG fuse(s)) : 1 x 0,25A  
 Secondary 400V (C circuit breaker(s)) : 1 x 1A

### OPTIONS:

Tropicalization