



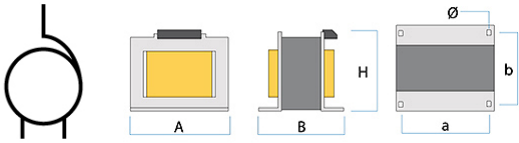

AMS 1600 - SINGLE-PHASE AUTOTRANSFORMER 230-400V - 1600VA - IP00



SKU: 41341
 Référence technique: 43B34

CARACTÉRISTIQUES TECHNIQUES:

Type : Autotransformer
 Current : single-phase
 Certification(s) : EN 60076
 Power : 1600 VA
 Primary voltage : 230-400V reversible
 Secondary voltage : 230-400V reversible
 :
 Protection : IP00
 Version : standard
 Inrush current : less than or equal to 11 I_n
 Heatings : B (IEC 60085)
 Max. ambient T° : 35°C
 No load losses : 19 W
 Load losses : 39 W
 Voltage drop : 2,4 %
 UCC : 2,1 %
 Efficiency : 96,5 %

DIMENSIONS:

Dimensions (A x B x H) : 135 x 118 x 135 mm
 Mounting centres (a x b) : 125 x 93 mm
 Mounting diameter (Ø) : 9x18 mm
 Weight : 8,2 kg

PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 8A
 Primary 230V (D circuit breaker) : 1 x 8A
 Primary 400V (aM fuse(s)) : 1 x 4A
 :
 Secondary 230V (gG fuse(s)) : 1 x 8A
 Secondary 230V (C circuit breaker(s)) : 1 x 8A
 Secondary 400V (gG fuse(s)) : 1 x 4A
 Secondary 400V (C circuit breaker(s)) : 1 x 4A

OPTIONS:

Tropicalization