




AMS 16000 - SINGLE-PHASE AUTOTRANSFORMER 230-400V - 16KVA - IP00

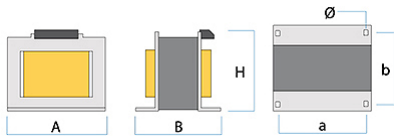

SKU: 41451
Référence technique: 43B45

CARACTÉRISTIQUES TECHNIQUES:

Type : Autotransformer
Current : single-phase
Certification(s) : EN 60076
Power : 16 kVA
Primary voltage : 230-400V reversible
Secondary voltage : 230-400V reversible
:
Protection : IP00
Version : standard
Inrush current : less than or equal to 11 In
Heatings : H (IEC 60085)
Max. ambient T° : 35°C
No load losses : 64 W
Load losses : 163 W
Voltage drop : 1 %
UCC : 1,4 %
Efficiency : 98,6 %

DIMENSIONS:

Dimensions (A x B x H) : 240 x 225 x 280 mm
Mounting centres (a x b) : 200 x 159 mm
Mounting diameter (Ø) : 12x31 mm
Weight : 40 kg

PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 80A
Primary 230V (D circuit breaker) : 1 x 80A
Primary 400V (aM fuse(s)) : 1 x 40A
:
Secondary 230V (gG fuse(s)) : 1 x 80A
Secondary 230V (C circuit breaker(s)) : 1 x 80A
Secondary 400V (gG fuse(s)) : 1 x 40A
Secondary 400V (C circuit breaker(s)) : 1 x 40A

OPTIONS:

Tropicalization