



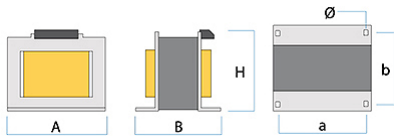

## AMS 2000 - SINGLE-PHASE AUTOTRANSFORMER 230-400V - 2KVA - IP00



SKU: 41351  
Référence technique: 43B35

### CARACTÉRISTIQUES TECHNIQUES:

Type : Autotransformer  
Current : single-phase  
Certification(s) : EN 60076  
Power : 2 kVA  
Primary voltage : 230-400V reversible  
Secondary voltage : 230-400V reversible  
:  
Protection : IP00  
Version : standard  
Inrush current : less than or equal to 11 In  
Heatings : B (IEC 60085)  
Max. ambient T° : 35°C  
No load losses : 25 W  
Load losses : 45,4 W  
Voltage drop : 2,2 %  
UCC : 2,3 %  
Efficiency : 96,6 %

### DIMENSIONS:

Dimensions (A x B x H) : 153 x 130 x 135 mm  
Mounting centres (a x b) : 125 x 105 mm  
Mounting diameter (ø) : 9x18 mm  
Weight : 9,2 kg

### PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 10A  
Primary 230V (D circuit breaker) : 1 x 10A  
Primary 400V (aM fuse(s)) : 1 x 5A  
:  
Secondary 230V (gG fuse(s)) : 1 x 10A  
Secondary 230V (C circuit breaker(s)) : 1 x 10A  
Secondary 400V (gG fuse(s)) : 1 x 5A  
Secondary 400V (C circuit breaker(s)) : 1 x 5A

### OPTIONS:

Tropicalization