



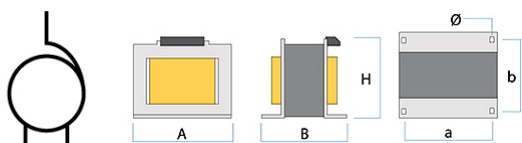

AMS 250 - SINGLE-PHASE AUTOTRANSFORMER 230-400V - 200VA - IP00



SKU: 41231
Référence technique: 43R23

CARACTÉRISTIQUES TECHNIQUES:

Type : Autotransformer
Current : single-phase
Certification(s) : EN 61558-2-13
Power : 200 VA
Primary voltage : 230-400V reversible
Secondary voltage : 230-400V reversible
:
Protection : IP00
Version : standard
Inrush current : less than or equal to 11 In
Heatings : B (IEC 60085)
Max. ambient T° : 35°C
No load losses : 6,2 W
Load losses : 10 W
Voltage drop : 3,8 %
UCC : 3,1 %
Efficiency : 93,9 %

DIMENSIONS:

Dimensions (A x B x H) : 99 x 95 x 90 mm
Mounting centres (a x b) : 80 x 60 mm
Mounting diameter (Ø) : 6x11 mm
Weight : 2,4 kg

PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 1,25A
Primary 230V (D circuit breaker) : 1 x 1,25A
Primary 400V (aM fuse(s)) : 1 x 0,63A
:
Secondary 230V (gG fuse(s)) : 1 x 1,25A
Secondary 230V (C circuit breaker(s)) : 1 x 1,25A
Secondary 400V (gG fuse(s)) : 1 x 0,63A
Secondary 400V (C circuit breaker(s)) : 1 x 1A

OPTIONS:

Tropicalization