



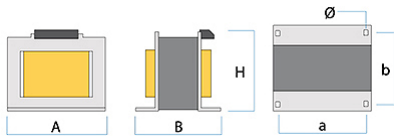

AMS 2500 - SINGLE-PHASE AUTOTRANSFORMER 230-400V - 2,5KVA - IP00



SKU: 41361
Référence technique: 43B36

CARACTÉRISTIQUES TECHNIQUES:

Type : Autotransformer
Current : single-phase
Certification(s) : EN 60076
Power : 2,5 kVA
Primary voltage : 230-400V reversible
Secondary voltage : 230-400V reversible
:
Protection : IP00
Version : standard
Inrush current : less than or equal to 11 In
Heatings : F (IEC 60085)
Max. ambient T° : 35°C
No load losses : 31 W
Load losses : 54 W
Voltage drop : 2,1 %
UCC : 1,8 %
Efficiency : 96,7 %

DIMENSIONS:

Dimensions (A x B x H) : 153 x 146 x 135 mm
Mounting centres (a x b) : 125 x 121 mm
Mounting diameter (ø) : 9x18 mm
Weight : 11,8 kg

PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 12A
Primary 230V (D circuit breaker) : 1 x 12A
Primary 400V (aM fuse(s)) : 1 x 6,3A
:
Secondary 230V (gG fuse(s)) : 1 x 12A
Secondary 230V (C circuit breaker(s)) : 1 x 12A
Secondary 400V (gG fuse(s)) : 1 x 6,3A
Secondary 400V (C circuit breaker(s)) : 1 x 6,3A

OPTIONS:

Tropicalization