



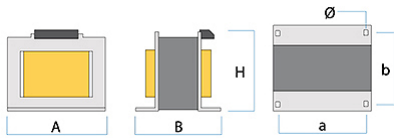

## AMS 3200 - SINGLE-PHASE AUTOTRANSFORMER 230-400V - 3,15KVA - IP00



SKU: 41381  
 Référence technique: 43B38

### CARACTÉRISTIQUES TECHNIQUES:

Type : Autotransformer  
 Current : single-phase  
 Certification(s) : EN 60076  
 Power : 3,15 kVA  
 Primary voltage : 230-400V reversible  
 Secondary voltage : 230-400V reversible  
 :  
 Protection : IP00  
 Version : standard  
 Inrush current : less than or equal to 11 In  
 Heatings : F (IEC 60085)  
 Max. ambient T° : 35°C  
 No load losses : 38 W  
 Load losses : 64,4 W  
 Voltage drop : 2 %  
 UCC : 1,9 %  
 Efficiency : 96,9 %

### DIMENSIONS:

Dimensions (A x B x H) : 153 x 170 x 135 mm  
 Mounting centres (a x b) : 125 x 141 mm  
 Mounting diameter (Ø) : 9x18 mm  
 Weight : 14,4 kg

### PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 16A  
 Primary 230V (D circuit breaker) : 1 x 16A  
 Primary 400V (aM fuse(s)) : 1 x 8A  
 :  
 Secondary 230V (gG fuse(s)) : 1 x 16A  
 Secondary 230V (C circuit breaker(s)) : 1 x 16A  
 Secondary 400V (gG fuse(s)) : 1 x 8A  
 Secondary 400V (C circuit breaker(s)) : 1 x 8A

### OPTIONS:

Tropicalization