




AMS 400 - SINGLE-PHASE AUTOTRANSFORMER 230-400V - 400VA - IP00

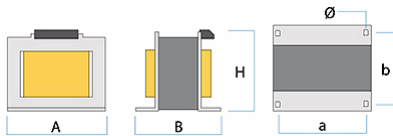

SKU: 41261
 Référence technique: 43R26

CARACTÉRISTIQUES TECHNIQUES:

Type : Autotransformer
 Current : single-phase
 Certification(s) : EN 61558-2-13
 Power : 400 VA
 Primary voltage : 230-400V reversible
 Secondary voltage : 230-400V reversible
 :
 Protection : IP00
 Version : standard
 Inrush current : less than or equal to 11 In
 Heatings : B (IEC 60085)
 Max. ambient T° : 35°C
 No load losses : 8 W
 Load losses : 12,2 W
 Voltage drop : 3 %
 UCC : 2,7 %
 Efficiency : 95,2 %

DIMENSIONS:

Dimensions (A x B x H) : 99 x 105 x 92 mm
 Mounting centres (a x b) : 80 x 71 mm
 Mounting diameter (Ø) : 6x11 mm
 Weight : 3,1 kg

PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 2A
 Primary 230V (D circuit breaker) : 1 x 2A
 Primary 400V (aM fuse(s)) : 1 x 1A
 :
 Secondary 230V (gG fuse(s)) : 1 x 2A
 Secondary 230V (C circuit breaker(s)) : 1 x 2A
 Secondary 400V (gG fuse(s)) : 1 x 1A
 Secondary 400V (C circuit breaker(s)) : 1 x 1A

OPTIONS:

Tropicalization