



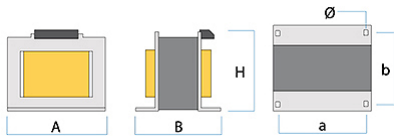

## AMS 4000 - SINGLE-PHASE AUTOTRANSFORMER 230-400V - 4KVA - IP00



SKU: 41391  
Référence technique: 43B39

### CARACTÉRISTIQUES TECHNIQUES:

Type : Autotransformer  
Current : single-phase  
Certification(s) : EN 60076  
Power : 4 kVA  
Primary voltage : 230-400V reversible  
Secondary voltage : 230-400V reversible  
:  
Protection : IP00  
Version : standard  
Inrush current : less than or equal to 11 In  
Heatings : F (IEC 60085)  
Max. ambient T° : 35°C  
No load losses : 44 W  
Load losses : 67 W  
Voltage drop : 1,6 %  
UCC : 1,4 %  
Efficiency : 97,3 %

### DIMENSIONS:

Dimensions (A x B x H) : 187 x 152 x 167 mm  
Mounting centres (a x b) : 155 x 115 mm  
Mounting diameter (ø) : 8x16 mm  
Weight : 17,8 kg

### PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 20A  
Primary 230V (D circuit breaker) : 1 x 20A  
Primary 400V (aM fuse(s)) : 1 x 10A  
:  
Secondary 230V (gG fuse(s)) : 1 x 20A  
Secondary 230V (C circuit breaker(s)) : 1 x 20A  
Secondary 400V (gG fuse(s)) : 1 x 10A  
Secondary 400V (C circuit breaker(s)) : 1 x 10A

### OPTIONS:

Tropicalization