




## AMS 630 - SINGLE-PHASE AUTOTRANSFORMER 230-400V - 630VA - IP00

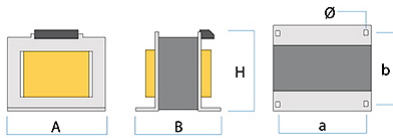

SKU: 41281  
Référence technique: 43R28

### CARACTÉRISTIQUES TECHNIQUES:

Type : Autotransformer  
Current : single-phase  
Certification(s) : EN 61558-2-13  
Power : 630 VA  
Primary voltage : 230-400V reversible  
Secondary voltage : 230-400V reversible  
:  
Protection : IP00  
Version : standard  
Inrush current : less than or equal to 11 In  
Heatings : B (IEC 60085)  
Max. ambient T° : 35°C  
No load losses : 11 W  
Load losses : 18,7 W  
Voltage drop : 2,9 %  
UCC : 2,9 %  
Efficiency : 95,5 %

### DIMENSIONS:

Dimensions (A x B x H) : 122 x 110 x 109 mm  
Mounting centres (a x b) : 100 x 78 mm  
Mounting diameter (ø) : 7x12 mm  
Weight : 4,4 kg

### PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 3,15A  
Primary 230V (D circuit breaker) : 1 x 3,15A  
Primary 400V (aM fuse(s)) : 1 x 1,6A  
:  
Secondary 230V (gG fuse(s)) : 1 x 3,15A  
Secondary 230V (C circuit breaker(s)) : 1 x 3,15A  
Secondary 400V (gG fuse(s)) : 1 x 1,6A  
Secondary 400V (C circuit breaker(s)) : 1 x 1,6A

### OPTIONS:

Tropicalization