



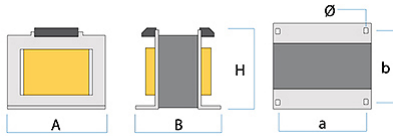

EUR162 - SAFETY & SEPARATION TRANSFORMER 230-400/2X24V - 160VA - IP00



SKU: 12211
Référence technique: S03Q21LV00

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
Current : single-phase
Certification(s) : EN 61558-2-6
Power : 160 VA
Primary voltage : 230-400V
Secondary voltage : 2x24V (24-48V)
:
Protection : IP00
Version : safety & circuits separation
Inrush current : less than or equal to 25 In
Heatings : B (IEC60085)
Max. ambient T° : 35°C
No load losses : 7,7 W
Load losses : 9 W
Voltage drop : 5,3 %
UCC : 5,7 %
Efficiency : 90,5 %

DIMENSIONS:

Dimensions (A x B x H) : 99 x 109 x 92 mm
Mounting centres (a x b) : 84 x 84 mm
Mounting diameter (ø) : 6x12 mm
Weight : 3,6 kg

PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 1,6A
Primary 230V (D circuit breaker) : 1 x 1,6A
Primary 400V (aM fuse(s)) : 1 x 0,8A
:
Secondary 24V : 1 x 6,3A
Secondary 48V : 1 x 4A

OPTIONS:

No options found.