



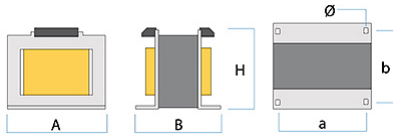

## EUR2502 - SAFETY & SEPARATION TRANSFORMER 230-400/2X24V - 2,5KVA - IP00



SKU: 12361  
Référence technique: S03Q36LV00

### CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer  
Current : single-phase  
Certification(s) : EN 61558-2-6  
Power : 2,5 kVA  
Primary voltage : 230-400V  
Secondary voltage : 2x24V (24-48V)  
:  
Protection : IP00  
Version : safety & circuits separation  
Inrush current : less than or equal to 25 In  
Heatings : F (IEC60085)  
Max. ambient T° : 35°C  
No load losses : 40,2 W  
Load losses : 106,8 W  
Voltage drop : 4,1 %  
UCC : 4,3 %  
Efficiency : 94,4 %

### DIMENSIONS:

Dimensions (A x B x H) : 240 x 190 x 275 mm  
Mounting centres (a x b) : 200 x 125 mm  
Mounting diameter (ø) : 12x32 mm  
Weight : 26,6 kg

### PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 25A  
Primary 230V (D circuit breaker) : 1 x 25A  
Primary 400V (aM fuse(s)) : 1 x 16A  
:  
Secondary 24V : 1 x 100A  
Secondary 48V : 1 x 50A

### OPTIONS:

No options found.