


## EURM42 - SINGLE-PHASE TRANSFORMER MULTI- VOLTAGE/2X24V - 40VA - IP00

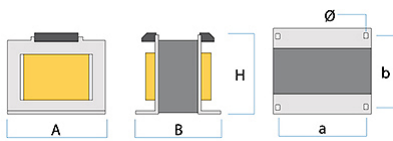

SKU: 14141  
Référence technique: S03F159V00

### CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer  
Current : single-phase  
Certification(s) : EN 61558-2-6 (24 V), EN 61558-2-4 (48 V), UL 5085-1, CSA C22.2  
Power : 40 VA  
Primary voltage : multi-voltage (215-230-245-380-400-415-440-460-480)  
Secondary voltage : 2x24V (24-48V)  
:  
Protection : IP00  
Version : Transformer (UL-CSA certified safety & circuits separation)  
Inrush current : less than or equal to 25 I<sub>n</sub>  
Heatings : 155°C  
Max. ambient T° : 40°C  
No load losses : 3 W  
Load losses : 4,7 W  
Voltage drop : 10,5 %  
UCC : 7,8 %  
Efficiency : 83,9 %

### DIMENSIONS:

Dimensions (A x B x H) : 78 x 105 x 95 mm  
Mounting centres (a x b) : 52 x 55 mm  
Mounting diameter (ø) : 6 x 14 mm  
Weight : 1,45 kg

### PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 0,5A  
Primary 230V (D circuit breaker) : 1 x 1A  
Primary 400V (aM fuse(s)) : 1 x 0,25A  
:  
Secondary 24V : 1 x 1,6A  
Secondary 48V : 1 x 0,8A  
Other voltages : N.C.

### OPTIONS:

No options found.