
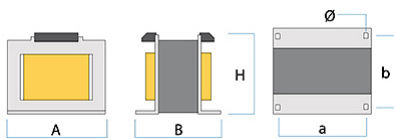


## EURM162 - SINGLE-PHASE TRANSFORMER MULTI- VOLTAGE/2X24V - 160VA - IP00



SKU: 14211  
Référence technique: S03F219V00

### CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer  
Current : single-phase  
Certification(s) : EN 61558-2-6 (24 V), EN 61558-2-4 (48 V), UL 5085-1, CSA C22.2  
Power : 160 VA  
Primary voltage : multi-voltage (215-230-245-380-400-415-440-460-480)  
Secondary voltage : 2x24V (24-48V)  
:  
Protection : IP00  
Version : Transformer (UL-CSA certified safety & circuits separation)  
Inrush current : less than or equal to 25 I<sub>n</sub>  
Heatings : 155°C  
Max. ambient T° : 40°C  
No load losses : 8 W  
Load losses : 13,4 W  
Voltage drop : 7,7 %  
UCC : 5,9 %  
Efficiency : 88,2 %

### DIMENSIONS:

Dimensions (A x B x H) : 97 x 120 x 110 mm  
Mounting centres (a x b) : 80 x 75 mm  
Mounting diameter (ø) : 6 x 12 mm  
Weight : 3,25 kg

### PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 1,6A  
Primary 230V (D circuit breaker) : 1 x 1,6A  
Primary 400V (aM fuse(s)) : 1 x 0,8A  
:  
Secondary 24V : 1 x 6,3A  
Secondary 48V : 1 x 4A  
Other voltages : N.C.

### OPTIONS:

No options found.