





M1 1250 - ON REQUEST SINGLE-PHASE TRANSFORMER 1250VA - IP00



SKU: M11250_Specific
Référence technique: 09B32...

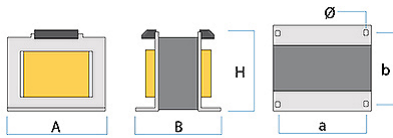

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
Current : single-phase
Certification(s) : EN 60076
Power : 1250 VA
Primary voltage : max. 1000V
Secondary voltage : max. 1000V
:
Protection : IP00
Version : Transformer (specific)
Inrush current : less than or equal to 25 In
Heatings : F (IEC 60085)
Max. ambient T° : 40°C
No load losses : 38 W
Load losses : 63 W
Voltage drop : 4,8 %
UCC : 3,6 %
Efficiency : 92,6 %

DIMENSIONS:

Dimensions (A x B x H) : 153 x 170 x 135 mm
Mounting centres (a x b) : 125 x 141 mm
Mounting diameter (Ø) : 9x18 mm
Weight : 14 kg

PROTECTION(S) RECOMMANDÉE(S):

:
Other voltages : N.C.

OPTIONS:

Electrostatic shield
Thermal sensors (PTC, PT100, Twin-blades)
Regulation tabs
Dual primary
Inrush current, frequency, heating, ambient temperature, specific altitude
Tropicalization