





M1 125 - ON REQUEST SINGLE-PHASE TRANSFORMER 125VA - IP00



SKU: M1125_Specific
 Référence technique: 09M19...

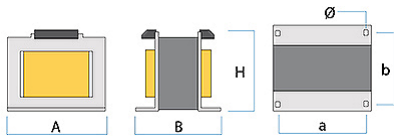

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
 Current : single-phase
 Certification(s) : EN 61558-2-1
 Power : 125 VA
 Primary voltage : max. 1000V
 Secondary voltage : max. 1000V
 :
 Protection : IP00
 Version : specific
 Inrush current : less than or equal to 25 In
 Heatings : B (IEC 60085)
 Max. ambient T° : 35°C
 No load losses : 7 W
 Load losses : 10,7 W
 Voltage drop : 7,9 %
 UCC : 6,5 %
 Efficiency : 87,6 %

DIMENSIONS:

Dimensions (A x B x H) : 99 x 100 x 95 mm
 Mounting centres (a x b) : 80 x 65 mm
 Mounting diameter (∅) : 6x11 mm
 Weight : 2,7 kg

PROTECTION(S) RECOMMANDÉE(S):

:
 Other voltages : N.C.

OPTIONS:

Electrostatic shield
 Thermal sensors (PTC, PT100, Twin-blades)
 Regulation tabs
 Dual primary
 Inrush current, frequency, heating, ambient temperature, specific altitude
 Tropicalization