






M1 5000 - ON REQUEST SINGLE-PHASE TRANSFORMER 5KVA - IP00

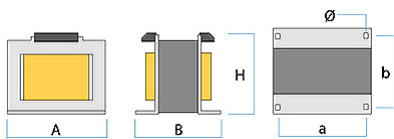

SKU: M15000_Specific
 Référence technique: 09B40...



CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
 Current : single-phase
 Certification(s) : EN 60076
 Power : 5 kVA
 Primary voltage : max. 1000V
 Secondary voltage : max. 1000V
 :
 Protection : IP00
 Version : Transformer (specific)
 Inrush current : less than or equal to 25 In
 Heatings : H (IEC 60085)
 Max. ambient T° : 40°C
 No load losses : 97 W
 Load losses : 150 W
 Voltage drop : 2,9 %
 UCC : 3,5 %
 Efficiency : 95,3 %

DIMENSIONS:

Dimensions (A x B x H) : 240 x 225 x 240 mm
 Mounting centres (a x b) : 200 x 159 mm
 Mounting diameter (ø) : 12x31 mm
 Weight : 39 kg

PROTECTION(S) RECOMMANDÉE(S):

:
 Other voltages : N.C.

OPTIONS:

Electrostatic shield
 Thermal sensors (PTC, PT100, Twin-blades)
 Regulation tabs
 Dual primary
 Inrush current, frequency, heating, ambient temperature, specific altitude
 Tropicalization