


## MUS 100 - SINGLE-PHASE TRANSFORMER (UL-CSA COMPATIBLE ) - 100VA - IP00

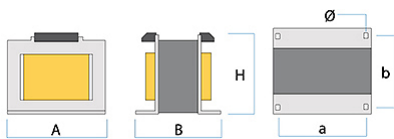

SKU: MUS100\_Specific  
Référence technique: 09F18...

### CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer  
Current : single-phase  
Certification(s) : UL 5085-1, CSA C22.2  
Power : 100 VA  
Primary voltage : max 600V  
Secondary voltage : max. 600V  
:  
Protection : IP00  
Version : specific compatible UL-CSA  
Inrush current : less than or equal to 25 In  
Heatings : 105°C  
Max. ambient T° : 40°C  
No load losses : 6,2 W  
Load losses : 8,52 W  
Voltage drop : 7,9 %  
UCC : 7,8 %  
Efficiency : 87,2 %

### DIMENSIONS:

Dimensions (A x B x H) : 99 x 100 x 90 mm  
Mounting centres (a x b) : 80 x 62 mm  
Mounting diameter (ø) : 6x11 mm  
Weight : 2,4 kg

### PROTECTION(S) RECOMMANDÉE(S):

:  
Other voltages : N.C.

### OPTIONS:

Electrostatic shield  
Thermal sensors (PTC, PT100, Twin-blades)  
Regulation tabs  
Dual primary  
Inrush current, frequency, heating, ambient temperature, specific altitude  
Tropicalization