
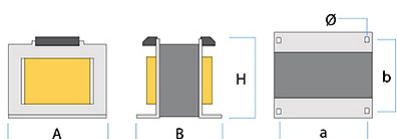


MUS 150 - SINGLE-PHASE TRANSFORMER (UL-CSA COMPATIBLE) - 150VA - IP00



SKU: MUS150_Specific
Référence technique: 09F20...

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
Current : single-phase
Certification(s) : UL 5085-1, CSA C22.2
Power : 150 VA
Primary voltage : max 600V
Secondary voltage : max. 600V
:
Protection : IP00
Version : specific compatible UL-CSA
Inrush current : less than or equal to 25 In
Heatings : 105°C
Max. ambient T° : 40°C
No load losses : 9,8 W
Load losses : 9,19 W
Voltage drop : 5,8 %
UCC : 5,7 %
Efficiency : 88,8 %

DIMENSIONS:

Dimensions (A x B x H) : 99 x 123 x 90 mm
Mounting centres (a x b) : 80 x 85 mm
Mounting diameter (ø) : 6x11 mm
Weight : 3,5 kg

PROTECTION(S) RECOMMANDÉE(S):

:
Other voltages : N.C.

OPTIONS:

Electrostatic shield
Thermal sensors (PTC, PT100, Twin-blades)
Regulation tabs
Dual primary
Inrush current, frequency, heating, ambient temperature, specific altitude
Tropicalization