



MUS 2500 - SINGLE-PHASE TRANSFORMER (UL-CSA COMPATIBLE) - 2,5KVA - IP00



SKU: MUS2500_Specific
Référence technique: 09F36...

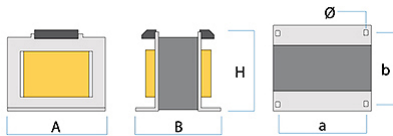

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
Current : single-phase
Certification(s) : UL 5085-1, CSA C22.2
Power : 2,5 kVA
Primary voltage : max 600V
Secondary voltage : max. 600V
:
Protection : IP00
Version : specific compatible UL-CSA
Inrush current : less than or equal to 25 In
Heatings : 130°C
Max. ambient T° : 40°C
No load losses : 58 W
Load losses : 117 W
Voltage drop : 4,1 %
UCC : 4,6 %
Efficiency : 93,8 %

DIMENSIONS:

Dimensions (A x B x H) : 240 x 175 x 252 mm
Mounting centres (a x b) : 200 x 118 mm
Mounting diameter (ø) : 12x31 mm
Weight : 24,1 kg

PROTECTION(S) RECOMMANDÉE(S):

:
Other voltages : N.C.

OPTIONS:

Electrostatic shield
Thermal sensors (PTC, PT100, Twin-blades)
Regulation tabs
Dual primary
Inrush current, frequency, heating, ambient temperature, specific altitude
Tropicalization