



MUS 250 - SINGLE-PHASE TRANSFORMER (UL-CSA COMPATIBLE) - 250VA - IP00



SKU: MUS250_Specific
 Référence technique: 09F23...

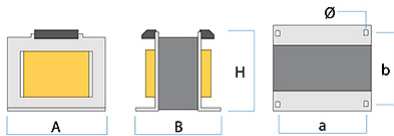

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
 Current : single-phase
 Certification(s) : UL 5085-1, CSA C22.2
 Power : 250 VA
 Primary voltage : max 600V
 Secondary voltage : max. 600V
 :
 Protection : IP00
 Version : specific compatible UL-CSA
 Inrush current : less than or equal to 25 In
 Heatings : 105°C
 Max. ambient T° : 40°C
 No load losses : 13 W
 Load losses : 14 W
 Voltage drop : 5,3 %
 UCC : 5,3 %
 Efficiency : 90,3 %

DIMENSIONS:

Dimensions (A x B x H) : 122 x 115 x 109 mm
 Mounting centres (a x b) : 100 x 83 mm
 Mounting diameter (ø) : 7x12 mm
 Weight : 4,9 kg

PROTECTION(S) RECOMMANDÉE(S):

:
 Other voltages : N.C.

OPTIONS:

Electrostatic shield
 Thermal sensors (PTC, PT100, Twin-blades)
 Regulation tabs
 Dual primary
 Inrush current, frequency, heating, ambient temperature, specific altitude
 Tropicalization