
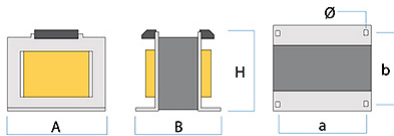


MUS 40 - SINGLE-PHASE TRANSFORMER (UL-CSA COMPATIBLE) - 40VA - IP00



SKU: MUS40_Specific
Référence technique: 09F14...

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
Current : single-phase
Certification(s) : UL 5085-1, CSA C22.2
Power : 40 VA
Primary voltage : max 600V
Secondary voltage : max. 600V
:
Protection : IP00
Version : specific compatible UL-CSA
Inrush current : less than or equal to 25 In
Heatings : 105°C
Max. ambient T° : 40°C
No load losses : 3,5 W
Load losses : 4,23 W
Voltage drop : 9,6 %
UCC : 9,5 %
Efficiency : 83,8 %

DIMENSIONS:

Dimensions (A x B x H) : 87 x 85 x 85 mm
Mounting centres (a x b) : 70 x 49 mm
Mounting diameter (Ø) : 5,5x10 mm
Weight : 1,3 kg

PROTECTION(S) RECOMMANDÉE(S):

:
Other voltages : N.C.

OPTIONS:

Electrostatic shield
Thermal sensors (PTC, PT100, Twin-blades)
Regulation tabs
Dual primary
Inrush current, frequency, heating, ambient temperature, specific altitude
Tropicalization