


## MUS 630 - SINGLE-PHASE TRANSFORMER (UL-CSA COMPATIBLE ) - 630VA - IP00



SKU: MUS630\_Specific  
 Référence technique: 09F28...

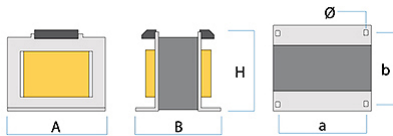

### CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer  
 Current : single-phase  
 Certification(s) : UL 5085-1, CSA C22.2  
 Power : 630 VA  
 Primary voltage : max 600V  
 Secondary voltage : max. 600V  
 :  
 Protection : IP00  
 Version : specific compatible UL-CSA  
 Inrush current : less than or equal to 25 In  
 Heatings : 105°C  
 Max. ambient T° : 40°C  
 No load losses : 30,6 W  
 Load losses : 15,9 W  
 Voltage drop : 2,5 %  
 UCC : 2,5 %  
 Efficiency : 93,1 %

### DIMENSIONS:

Dimensions (A x B x H) : 153 x 149 x 135 mm  
 Mounting centres (a x b) : 125 x 121 mm  
 Mounting diameter (ø) : 9x18 mm  
 Weight : 11,9 kg

### PROTECTION(S) RECOMMANDÉE(S):

:  
 Other voltages : N.C.

### OPTIONS:

Electrostatic shield  
 Thermal sensors (PTC, PT100, Twin-blades)  
 Regulation tabs  
 Dual primary  
 Inrush current, frequency, heating, ambient temperature, specific altitude  
 Tropicalization