
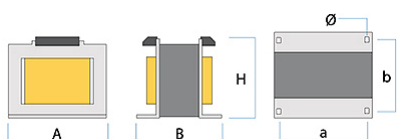


## MUS 63 - SINGLE-PHASE TRANSFORMER (UL-CSA COMPATIBLE ) - 63VA - IP00



SKU: MUS63\_Specific  
 Référence technique: 09F16...

### CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer  
 Current : single-phase  
 Certification(s) : UL 5085-1, CSA C22.2  
 Power : 63 VA  
 Primary voltage : max 600V  
 Secondary voltage : max. 600V  
 :  
 Protection : IP00  
 Version : specific compatible UL-CSA  
 Inrush current : less than or equal to 25 In  
 Heatings : 105°C  
 Max. ambient T° : 40°C  
 No load losses : 4,3 W  
 Load losses : 5,54 W  
 Voltage drop : 8,1 %  
 UCC : 8,1 %  
 Efficiency : 86,5 %

### DIMENSIONS:

Dimensions (A x B x H) : 87 x 92 x 85 mm  
 Mounting centres (a x b) : 70 x 56 mm  
 Mounting diameter (Ø) : 5,5x10 mm  
 Weight : 1,7 kg

### PROTECTION(S) RECOMMANDÉE(S):

:  
 Other voltages : N.C.

### OPTIONS:

Electrostatic shield  
 Thermal sensors (PTC, PT100, Twin-blades)  
 Regulation tabs  
 Dual primary  
 Inrush current, frequency, heating, ambient temperature, specific altitude  
 Tropicalization