




**TPA 125000 - THREE-PHASE  
 TRANSFORMER 400/230V ±5% -  
 ELECTROSTATIC SHIELD - 125KVA -  
 IP00**

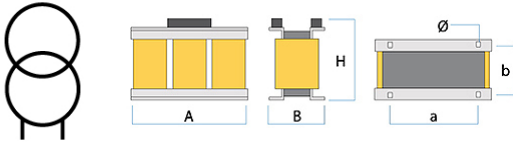

SKU: 34544  
 Référence technique: S37B54FDF1000

**CARACTÉRISTIQUES TECHNIQUES:**

Type : Transformer  
 Current : three-phase  
 Certification(s) : EN 60076  
 Power : 125 kVA  
 Primary voltage : 400V  
 Secondary voltage : 230V (Y+N)  
 :  
 Protection : IP00  
 Version : with electrostatic shield & regulation tabs ±5%  
 Inrush current : less than or equal to 7 In  
 Heatings : H (IEC 60085)  
 Max. ambient T° : 35°C  
 No load losses : 800 W  
 Load losses : 2850 W  
 Voltage drop : 2,2 %  
 UCC : 4,7 %  
 Efficiency : 97,2 %

**DIMENSIONS:**

Dimensions (A x B x H) : 640 x 500 x 600 mm  
 Mounting centres (a x b) : 460 x 320 mm  
 Mounting diameter (Ø) : 14 mm  
 Weight : 425 kg

**PROTECTION(S) RECOMMANDÉE(S):**

Primary 400V (aM fuse(s)) : 3 x 200A  
 :  
 Secondary 230V (gG fuse(s)) : 4 x 315A  
 Secondary 230V (C circuit breaker(s)) : 4 x 315A

**OPTIONS:**

Tropicalization  
 Vibration isolating mount  
 Runnig wheels