




**TPA 200000 - THREE-PHASE
 TRANSFORMER 400/400V ±5% -
 ELECTROSTATIC SHIELD - 200KVA -
 IP00**



SKU: 33564
 Référence technique: S37B56FFF1000

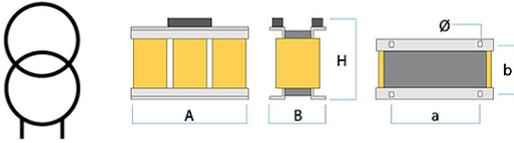

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
 Current : three-phase
 Certification(s) : EN 60076
 Power : 200 kVA
 Primary voltage : 400V
 Secondary voltage : 400V (Y+N)
 :
 Protection : IP00
 Version : with electrostatic shield & regulation tabs ±5%
 Inrush current : less than or equal to 7 In
 Heatings : H (IEC 60085)
 Max. ambient T° : 35°C
 No load losses : 1070 W
 Load losses : 3590 W
 Voltage drop : 1,8 %
 UCC : 4 %
 Efficiency : 97,7 %

DIMENSIONS:

Dimensions (A x B x H) : 745 x 520 x 620 mm
 Mounting centres (a x b) : 500 x 360 mm
 Mounting diameter (∅) : 14 mm
 Weight : 595 kg

PROTECTION(S) RECOMMANDÉE(S):

Primary 400V (aM fuse(s)) : 3 x 315A
 :
 Secondary 400V (gG fuse(s)) : 4 x 315A
 Secondary 400V (C circuit breaker(s)) : 4 x 315A

OPTIONS:

Tropicalization
 Vibration isolating mount
 Runnig wheels