




**TPA 315000 - THREE-PHASE
TRANSFORMER 400/230V ±5% -
ELECTROSTATIC SHIELD - 315KVA -
IP00**



SKU: 34584
Référence technique: S37B58FDF1000

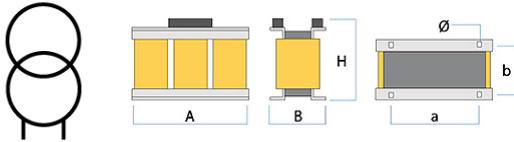

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
Current : three-phase
Certification(s) : EN 60076
Power : 315 kVA
Primary voltage : 400V
Secondary voltage : 230V (Y+N)
:
Protection : IP00
Version : with electrostatic shield & regulation tabs ±5%
Inrush current : less than or equal to 7 In
Heatings : H (IEC 60085)
Max. ambient T° : 35°C
No load losses : 1500 W
Load losses : 5180 W
Voltage drop : 1,6 %
UCC : 4,7 %
Efficiency : 97,9 %

DIMENSIONS:

Dimensions (A x B x H) : 800 x 550 x 740 mm
Mounting centres (a x b) : 580 x 400 mm
Mounting diameter (Ø) : 14 mm
Weight : 845 kg

PROTECTION(S) RECOMMANDÉE(S):

Primary 400V (aM fuse(s)) : 3 x 500A
:
Secondary 230V (gG fuse(s)) : 4 x 800A
Secondary 230V (C circuit breaker(s)) : 4 x 800A

OPTIONS:

Tropicalization
Vibration isolating mount
Runnig wheels