




## TPAE 65 315000 - ON REQUEST THREE-PHASE DUST & WATER TIGHT TRANSFORMER 315KVA - IP65



SKU: TP AE65315000\_Specific  
Référence technique: S39B58...P.....

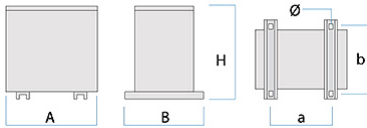

### CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer  
Current : three-phase  
Certification(s) : EN 60076  
Power : 315 kVA  
Primary voltage : max. 1000V  
Secondary voltage : max. 1000V  
:  
Protection : IP65-IK08  
Version : Transformer (standard)  
Inrush current : less than or equal to 12 In  
Heatings : H (IEC 60085)  
Max. ambient T° : 35°C  
No load losses : 2515 W  
Load losses : 2115 W  
Voltage drop : 1,3 %  
UCC : 2,4 %  
Efficiency : 98,2 %

### DIMENSIONS:

Dimensions (A x B x H) : 1500 x 1400 x 1700 mm  
Mounting centres (a x b) : 970 x 1350 mm  
Mounting diameter (ø) : 15 mm  
Weight : 2060 kg

### PROTECTION(S) RECOMMANDÉE(S):

:  
Other voltages : N.C.

### OPTIONS:

Electrostatic shield  
Thermal sensors (PTC, PT100, Twin-blades)  
Regulation tabs  
Primary and/or secondary coupling (star, delta, zig-zag)  
Dual primary  
Inrush current, frequency, heating, ambient temperature, specific altitude  
Tropicalization  
Vibration isolating mount  
Runnig wheels  
Factory assembled and wired primary and secondary protections  
Specific colour for the enclosure