




**TPAP 400000 - THREE-PHASE  
TRANSFORMER 400/230V ±5% -  
ELECTROSTATIC SHIELD - 400KVA -  
IP21**

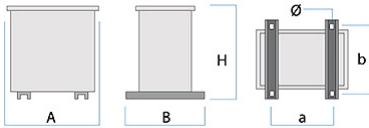

SKU: 34598  
Référence technique: S38B59FDF1000

### CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer  
Current : three-phase  
Certification(s) : EN 60076  
Power : 400 kVA  
Primary voltage : 400V  
Secondary voltage : 230V (Y+N)  
:  
Protection : IP21-IK08  
Version : Transformer (electrostatic shield & regulation tabs ±5%)  
Inrush current : less than or equal to 7 In  
Heatings : H (IEC 60085)  
Max. ambient T° : 40°C  
No load losses : 1700 W  
Load losses : 6180 W  
Voltage drop : 1,5 %  
UCC : 4,6 %  
Efficiency : 98,1 %

### DIMENSIONS:

Dimensions (A x B x H) : 1350 x 1200 x 1350 mm  
Mounting centres (a x b) : 920 x 1150 mm  
Mounting diameter (Ø) : 14 mm  
Weight : 1185 kg

### PROTECTION(S) RECOMMANDÉE(S):

Primary 400V (aM fuse(s)) : 3 x 630A  
:  
Secondary 230V (gG fuse(s)) : 4 x 1000A  
Secondary 230V (C circuit breaker(s)) : 4 x 1000A

### OPTIONS:

Tropicalization  
Vibration isolating mount  
Runnig wheels  
Factory assembled and wired primary and secondary protections  
Specific colour for the enclosure