




TPAP 8000 - THREE-PHASE TRANSFORMER 400/230V $\pm 5\%$ - ELECTROSTATIC SHIELD - 8KVA - IP21

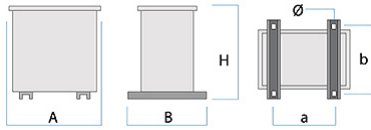

SKU: 34428
Référence technique: A38B42FDF1000

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
Current : three-phase
Certification(s) : EN 60076
Power : 8 kVA
Primary voltage : 400V
Secondary voltage : 230V (Y+N)
:
Protection : IP21-IK08
Version : Transformer (electrostatic shield & regulation tabs $\pm 5\%$)
Inrush current : less than or equal to 12 In
Heatings : H (IEC 60085)
Max. ambient T° : 40°C
No load losses : 100 W
Load losses : 485 W
Voltage drop : 5,7 %
UCC : 6,1 %
Efficiency : 93,2 %

DIMENSIONS:

Dimensions (A x B x H) : 580 x 370 x 600 mm
Mounting centres (a x b) : 330 x 340 mm
Mounting diameter (\varnothing) : 11x22 mm
Weight : 65 kg

PROTECTION(S) RECOMMANDÉE(S):

Primary 400V (aM fuse(s)) : 3 x 12A
:
Secondary 230V (gG fuse(s)) : 4 x 20A
Secondary 230V (C circuit breaker(s)) : 4 x 20A

OPTIONS:

Tropicalization
Vibration isolating mount
Runnig wheels
Factory assembled and wired primary and secondary protections
Specific colour for the enclosure