




TPEC 10000 - THREE-PHASE TRANSFORMER ECO-DESIGN A0AK 400/230V - 10KVA - IP00



SKU: 36431
 Référence technique: A66B43FD00000

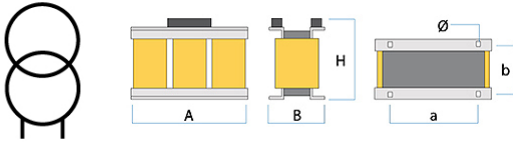

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
 Current : three-phase
 Certification(s) : EN 60076
 Power : 10 kVA
 Primary voltage : 400V
 Secondary voltage : 230V (Y+N)
 :
 Protection : IP00
 Version : Transformer (energy savings ECO DESIGN A0AK)
 Inrush current : less than or equal to 7 In
 Heatings : H (IEC 60085)
 Max. ambient T° : 40°C
 No load losses : 55 W
 Load losses : 530 W
 Voltage drop : 5 %
 UCC : 5,5 %
 Efficiency : 94,5 %

DIMENSIONS:

Dimensions (A x B x H) : 420 x 265 x 350 mm
 Mounting centres (a x b) : 330 x 235 mm
 Mounting diameter (∅) : 11 x 22 mm
 Weight : 58 kg

PROTECTION(S) RECOMMANDÉE(S):

Primary 400V (aM fuse(s)) : 3 x 16A
 :
 Secondary 230V (gG fuse(s)) : 4 x 25A
 Secondary 230V (C circuit breaker(s)) : 4 x 25A
 Secondary 400V (gG fuse(s)) : 4 x 16A
 Secondary 400V (C circuit breaker(s)) : 4 x 16A

OPTIONS:

Electrostatic shield
 Thermal sensors (PTC, PT100, Twin-blades)
 Regulation tabs
 Primary and/or secondary coupling (star, delta, zig-zag)
 Dual primary
 Inrush current, frequency, heating, ambient temperature, specific altitude
 Tropicalization
 Vibration isolating mount

Runnig wheels