





## TPEC 400000 - THREE-PHASE TRANSFORMER ECO-DESIGN A0AK 400/400V - 400KVA - IP00



SKU: 35591  
Référence technique: S66B59FF00000

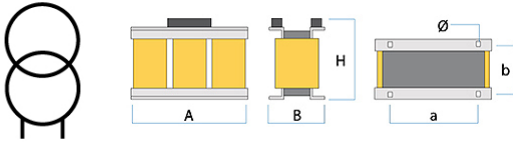

### CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer  
Current : three-phase  
Certification(s) : EN 60076  
Power : 400 kVA  
Primary voltage : 400V  
Secondary voltage : 400V (Y+N)  
:  
Protection : IP00  
Version : économies d'énergie ECO DESIGN A0Ak  
Inrush current : less than or equal to 7 In  
Heatings : H (IEC 60085)  
Max. ambient T° : 35°C  
No load losses : 675 W  
Load losses : 4500 W  
Voltage drop : 1,1 %  
UCC : 4,7 %  
Efficiency : 98,7 %

### DIMENSIONS:

Dimensions (A x B x H) : 1000 x 700 x 800 mm  
Mounting centres (a x b) : 640 x 500 mm  
Mounting diameter (ø) : 14 mm  
Weight : 1270 kg

### PROTECTION(S) RECOMMANDÉE(S):

Primary 400V (aM fuse(s)) : 3 x 630A  
:  
Secondary 400V (gG fuse(s)) : 4 x 630A  
Secondary 400V (C circuit breaker(s)) : 4 x 630A

### OPTIONS:

Electrostatic shield  
Thermal sensors (PTC, PT100, Twin-blades)  
Regulation tabs  
Primary and/or secondary coupling (star, delta, zig-zag)  
Dual primary  
Inrush current, frequency, heating, ambient temperature, specific altitude  
Tropicalization  
Vibration isolating mount  
Runnig wheels