





TPECP 16000 - THREE-PHASE TRANSFORMER ECO-DESIGN A0AK 400/400V - 16KVA - IP21

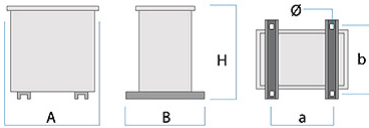

SKU: 35455
Référence technique: A67B45FF00000



CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
Current : three-phase
Certification(s) : EN 60076
Power : 16 kVA
Primary voltage : 400V
Secondary voltage : 400V (Y+N)
:
Protection : IP21-IK08
Version : Transformer (energy savings ECO DESIGN A0AK)
Inrush current : less than or equal to 7 In
Heatings : H (IEC 60085)
Max. ambient T° : 40°C
No load losses : 75 W
Load losses : 735 W
Voltage drop : 4,4 %
UCC : 5,1 %
Efficiency : 95,2 %

DIMENSIONS:

Dimensions (A x B x H) : 580 x 370 x 600 mm
Mounting centres (a x b) : 395 x 340 mm
Mounting diameter (Ø) : 11 x 22 mm
Weight : 132 kg

PROTECTION(S) RECOMMANDÉE(S):

Primary 400V (aM fuse(s)) : 3 x 25A
:
Secondary 400V (gG fuse(s)) : 4 x 25A
Secondary 400V (C circuit breaker(s)) : 4 x 25A

OPTIONS:

Electrostatic shield
Thermal sensors (PTC, PT100, Twin-blades)
Regulation tabs
Primary and/or secondary coupling (star, delta, zig-zag)
Dual primary
Inrush current, frequency, heating, ambient temperature, specific altitude
Tropicalization
Vibration isolating mount
Runnig wheels
Factory assembled and wired primary and secondary protections

Specific colour for the enclosure