



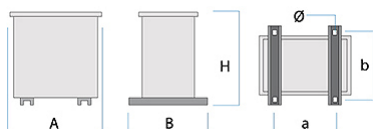

TPECP 400000 - ON REQUEST THREE-PHASE TRANSFORMER ECO-DESIGN A0AK 400KVA - IP21



SKU: TPECP400000_Specific
Référence technique: S67B59...

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
Current : three-phase
Certification(s) : EN 60076
Power : 400 kVA
Primary voltage : max. 1000V
Secondary voltage : max. 1000V
:
Protection : IP21-IK08
Version : économies d'énergie ECO DESIGN A0Ak (specific)
Inrush current : less than or equal to 7 In
Heatings : H (IEC 60085)
Max. ambient T° : 35°C
No load losses : 675 W
Load losses : 4500 W
Voltage drop : 1,1 %
UCC : 4,7 %
Efficiency : 98,7 %

DIMENSIONS:

Dimensions (A x B x H) : 1450 x 1200 x 1450 mm
Mounting centres (a x b) : 920 x 1150 mm
Mounting diameter (Ø) : 14 mm
Weight : 1405 kg

PROTECTION(S) RECOMMANDÉE(S):

:
Other voltages : N.C.

OPTIONS:

Electrostatic shield
Thermal sensors (PTC, PT100, Twin-blades)
Regulation tabs
Primary and/or secondary coupling (star, delta, zig-zag)
Dual primary
Inrush current, frequency, heating, ambient temperature, specific altitude
Tropicalization
Vibration isolating mount
Runnig wheels
Factory assembled and wired primary and secondary protections
Specific colour for the enclosure