





TPP 2500 - ON REQUEST THREE-PHASE TRANSFORMER 2,5KVA - IP21



SKU: TPP2500_Specific
Référence technique: 29M36...

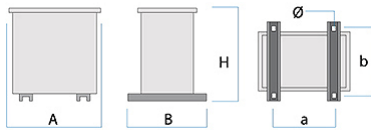

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
Current : three-phase
Certification(s) : EN 61558-2-1
Power : 2,5 kVA
Primary voltage : max. 1000V
Secondary voltage : max. 1000V
:
Protection : IP21-IK08
Version : specific
Inrush current : less than or equal to 25 In
Heatings : F (IEC 60085)
Max. ambient T° : 35°C
No load losses : 59 W
Load losses : 114 W
Voltage drop : 4,4 %
UCC : 3,2 %
Efficiency : 93,5 %

DIMENSIONS:

Dimensions (A x B x H) : 380 x 370 x 530 mm
Mounting centres (a x b) : 200 x 340 mm
Mounting diameter (Ø) : 11x22 mm
Weight : 35 kg

PROTECTION(S) RECOMMANDÉE(S):

:
Other voltages : N.C.

OPTIONS:

Electrostatic shield
Thermal sensors (PTC, PT100, Twin-blades)
Regulation tabs
Primary and/or secondary coupling (star, delta, zig-zag)
Dual primary
Inrush current, frequency, heating, ambient temperature, specific altitude
Tropicalization
Specific colour for the enclosure