





**M1 2500 - SINGLE-PHASE  
TRANSFORMER 230/230V ±5% -  
ELECTROSTATIC SHIELD - 2,5KVA -  
IP00**



SKU: 21364  
Référence technique: 09B36DDF1000

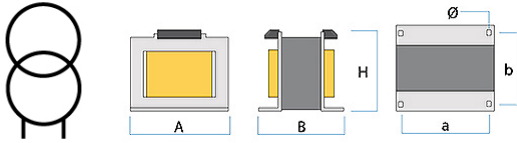

### CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer  
Current : single-phase  
Certification(s) : EN 60076  
Power : 2,5 kVA  
Primary voltage : 230V  
Secondary voltage : 230V  
:  
Protection : IP00  
Version : Transformer (electrostatic shield & regulation tabs ±5%)  
Inrush current : less than or equal to 25 I<sub>n</sub>  
Heatings : F (IEC 60085)  
Max. ambient T° : 40°C  
No load losses : 60 W  
Load losses : 89 W  
Voltage drop : 3,4 %  
UCC : 2,9 %  
Efficiency : 94,4 %

### DIMENSIONS:

Dimensions (A x B x H) : 187 x 185 x 167 mm  
Mounting centres (a x b) : 155 x 145 mm  
Mounting diameter (ø) : 8x16 mm  
Weight : 23,9 kg

### PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 25A  
Primary 230V (D circuit breaker) : 1 x 25A  
:  
Secondary 230V (gG fuse(s)) : 1 x 10A  
Secondary 230V (C circuit breaker(s)) : 1 x 10A

### OPTIONS:

Tropicalization