



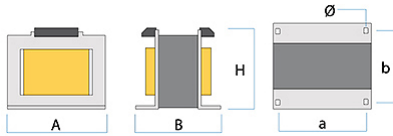

## EUR402 - SAFETY & SEPARATION TRANSFORMER 230-400/2X24V - 400VA - IP00



SKU: 12261  
Référence technique: S03Q26LV00

### CARACTÉRISTIQUES TECHNIQUES:

---

Type : Transformer  
Current : single-phase  
Certification(s) : EN 61558-2-6  
Power : 400 VA  
Primary voltage : 230-400V  
Secondary voltage : 2x24V (24-48V)  
:  
Protection : IP00  
Version : safety & circuits separation  
Inrush current : less than or equal to 25 In  
Heatings : B (IEC60085)  
Max. ambient T° : 35°C  
No load losses : 11,1 W  
Load losses : 18 W  
Voltage drop : 4,3 %  
UCC : 3,8 %  
Efficiency : 93,2 %

### DIMENSIONS:

---

Dimensions (A x B x H) : 122 x 125 x 108 mm  
Mounting centres (a x b) : 100 x 105 mm  
Mounting diameter (ø) : 7x14 mm  
Weight : 6,7 kg

### PROTECTION(S) RECOMMANDÉE(S):

---

Primary 230V (aM fuse) : 1 x 4A  
Primary 230V (D circuit breaker) : 1 x 4A  
Primary 400V (aM fuse(s)) : 1 x 2A  
:  
Secondary 24V : 1 x 16A  
Secondary 48V : 1 x 8A

### OPTIONS:

---

No options found.