



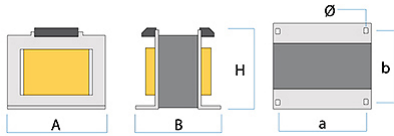

## EUR1602 - SAFETY & SEPARATION TRANSFORMER 230-400/2X24V - 1600VA - IP00



SKU: 12341  
Référence technique: S03Q34LV00

### CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer  
Current : single-phase  
Certification(s) : EN 61558-2-6  
Power : 1600 VA  
Primary voltage : 230-400V  
Secondary voltage : 2x24V (24-48V)  
:  
Protection : IP00  
Version : Transformer (safety & circuits separation)  
Inrush current : less than or equal to 25 In  
Heatings : F (IEC60085)  
Max. ambient T° : 40°C  
No load losses : 30,3 W  
Load losses : 59,8 W  
Voltage drop : 3,6 %  
UCC : 3 %  
Efficiency : 94,7 %

### DIMENSIONS:

Dimensions (A x B x H) : 186 x 210 x 228 mm  
Mounting centres (a x b) : 155 x 130 mm  
Mounting diameter (ø) : 7x7 mm  
Weight : 20 kg

### PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 16A  
Primary 230V (D circuit breaker) : 1 x 16A  
Primary 400V (aM fuse(s)) : 1 x 8A  
:  
Secondary 24V : 1 x 63A  
Secondary 48V : 1 x 32A

### OPTIONS:

No options found.