
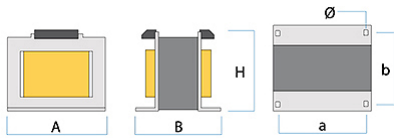



EURM41 - SINGLE-PHASE TRANSFORMER MULTI- VOLTAGE/2X115V - 40VA - IP00



SKU: 15141
 Référence technique: S03F159J00

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
 Current : single-phase
 Certification(s) : EN 61558-2-4, UL C22.2, CSA 5085-1
 Power : 40 VA
 Primary voltage : multi-voltage (215-230-245-380-400-415-440-460-480)
 Secondary voltage : 2x115V (115-230V)
 :
 Protection : IP00
 Version : Transformer (UL-CSA certified circuits separation)
 Inrush current : less than or equal to 25 In
 Heatings : 155°C
 Max. ambient T° : 40°C
 No load losses : 2,9 W
 Load losses : 4,7 W
 Voltage drop : 10,5 %
 UCC : 7,9 %
 Efficiency : 84 %

DIMENSIONS:

Dimensions (A x B x H) : 78 x 105 x 95 mm
 Mounting centres (a x b) : 52 x 55 mm
 Mounting diameter (Ø) : 6 x 14 mm
 Weight : 1,4 kg

PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 0,5A
 Primary 230V (D circuit breaker) : 1 x 1A
 Primary 400V (aM fuse(s)) : 1 x 0,25A
 :
 Secondary 230V : 1 x 0,16A
 Other voltages : N.C.

OPTIONS:

No options found.