
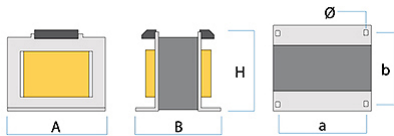


## EURM251 - SINGLE-PHASE TRANSFORMER MULTI- VOLTAGE/2X115V - 250VA - IP00



SKU: 15231  
Référence technique: S03F239J00

### CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer  
Current : single-phase  
Certification(s) : EN 61558-2-4, UL C22.2, CSA 5085-1  
Power : 250 VA  
Primary voltage : multi-voltage (215-230-245-380-400-415-440-460-480)  
Secondary voltage : 2x115V (115-230V)  
:  
Protection : IP00  
Version : Transformer (UL-CSA certified circuits separation)  
Inrush current : less than or equal to 25 In  
Heatings : 155°C  
Max. ambient T° : 40°C  
No load losses : 9 W  
Load losses : 26,3 W  
Voltage drop : 9,5 %  
UCC : 7,4 %  
Efficiency : 87,6 %

### DIMENSIONS:

Dimensions (A x B x H) : 125 x 110 x 125 mm  
Mounting centres (a x b) : 100 x 70 mm  
Mounting diameter (ø) : 7 x 14 mm  
Weight : 4,2 kg

### PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 2,5A  
Primary 230V (D circuit breaker) : 1 x 2,5A  
Primary 400V (aM fuse(s)) : 1 x 1,6A  
:  
Secondary 230V : 1 x 1A  
Other voltages : N.C.

### OPTIONS:

No options found.