



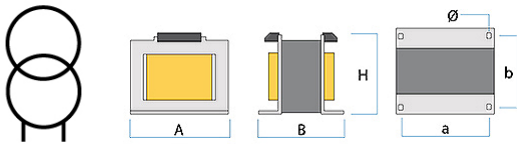

**M1 2500 - SINGLE-PHASE
 TRANSFORMER 400/230V ±5% -
 ELECTROSTATIC SHIELD - 2,5KVA -
 IP00**



SKU: 22364

Référence technique: 09B36FDF1000

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
 Current : single-phase
 Certification(s) : EN 60076
 Power : 2,5 kVA
 Primary voltage : 400V
 Secondary voltage : 230V
 :
 Protection : IP00
 Version : Transformer (electrostatic shield & regulation tabs ±5%)
 Inrush current : less than or equal to 25 I_n
 Heatings : F (IEC 60085)
 Max. ambient T° : 40°C
 No load losses : 60 W
 Load losses : 89 W
 Voltage drop : 3,4 %
 UCC : 2,9 %
 Efficiency : 94,4 %

DIMENSIONS:

Dimensions (A x B x H) : 187 x 185 x 167 mm
 Mounting centres (a x b) : 155 x 145 mm
 Mounting diameter (Ø) : 8x16 mm
 Weight : 23,9 kg

PROTECTION(S) RECOMMANDÉE(S):

Primary 400V (aM fuse(s)) : 1 x 16A
 :
 Secondary 230V (gG fuse(s)) : 1 x 10A
 Secondary 230V (C circuit breaker(s)) : 1 x 10A

OPTIONS:

Tropicalization