





**M1 315 - SINGLE-PHASE
TRANSFORMER 230/230V ±5% -
ELECTROSTATIC SHIELD - 315VA - IP00**



SKU: 21244
Référence technique: 09M25DDF1000

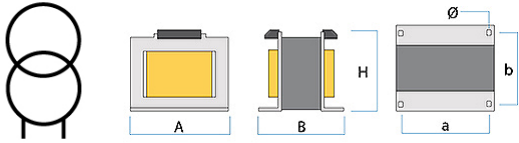

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
Current : single-phase
Certification(s) : EN 61558-2-1
Power : 315 VA
Primary voltage : 230V
Secondary voltage : 230V
:
Protection : IP00
Version : with electrostatic shield & regulation tabs ±5%
Inrush current : less than or equal to 25 In
Heatings : B (IEC 60085)
Max. ambient T° : 35°C
No load losses : 13 W
Load losses : 21 W
Voltage drop : 6,3 %
UCC : 5,2 %
Efficiency : 90,2 %

DIMENSIONS:

Dimensions (A x B x H) : 122 x 115 x 109 mm
Mounting centres (a x b) : 100 x 83 mm
Mounting diameter (ø) : 7x12 mm
Weight : 5 kg

PROTECTION(S) RECOMMANDÉE(S):

Primary 230V (aM fuse) : 1 x 3,15A
Primary 230V (D circuit breaker) : 1 x 3,15A
:
Secondary 230V (gG fuse(s)) : 1 x 1,6A
Secondary 230V (C circuit breaker(s)) : 1 x 1,6A

OPTIONS:

Tropicalization