



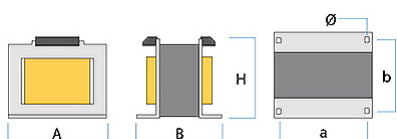

M1 630 - ON REQUEST SINGLE-PHASE TRANSFORMER 630VA - IP00



SKU: M1630_Specific
 Référence technique: 09M28...

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
 Current : single-phase
 Certification(s) : EN 61558-2-1
 Power : 630 VA
 Primary voltage : max. 1000V
 Secondary voltage : max. 1000V
 :
 Protection : IP00
 Version : specific
 Inrush current : less than or equal to 25 In
 Heatings : B (IEC 60085)
 Max. ambient T° : 35°C
 No load losses : 19 W
 Load losses : 40 W
 Voltage drop : 5,9 %
 UCC : 5 %
 Efficiency : 91,5 %

DIMENSIONS:

Dimensions (A x B x H) : 153 x 120 x 135 mm
 Mounting centres (a x b) : 125 x 91 mm
 Mounting diameter (∅) : 9x18 mm
 Weight : 7,8 kg

PROTECTION(S) RECOMMANDÉE(S):

:
 Other voltages : N.C.

OPTIONS:

Electrostatic shield
 Thermal sensors (PTC, PT100, Twin-blades)
 Regulation tabs
 Dual primary
 Inrush current, frequency, heating, ambient temperature, specific altitude
 Tropicalization