




**TPA 400000 - THREE-PHASE
 TRANSFORMER 400/230V ±5% -
 ELECTROSTATIC SHIELD - 400KVA -
 IP00**

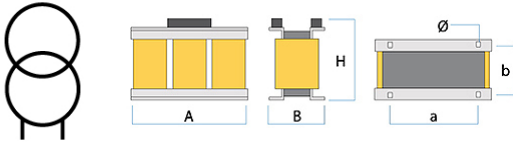

SKU: 34594
 Référence technique: S37B59FDF1000

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
 Current : three-phase
 Certification(s) : EN 60076
 Power : 400 kVA
 Primary voltage : 400V
 Secondary voltage : 230V (Y+N)
 :
 Protection : IP00
 Version : with electrostatic shield & regulation tabs ±5%
 Inrush current : less than or equal to 7 In
 Heatings : H (IEC 60085)
 Max. ambient T° : 35°C
 No load losses : 1700 W
 Load losses : 6180 W
 Voltage drop : 1,5 %
 UCC : 4,6 %
 Efficiency : 98,1 %

DIMENSIONS:

Dimensions (A x B x H) : 880 x 650 x 800 mm
 Mounting centres (a x b) : 580 x 400 mm
 Mounting diameter (∅) : 14 mm
 Weight : 1060 kg

PROTECTION(S) RECOMMANDÉE(S):

Primary 400V (aM fuse(s)) : 3 x 630A
 :
 Secondary 230V (gG fuse(s)) : 4 x 1000A
 Secondary 230V (C circuit breaker(s)) : 4 x 1000A

OPTIONS:

Tropicalization
 Vibration isolating mount
 Runnig wheels