



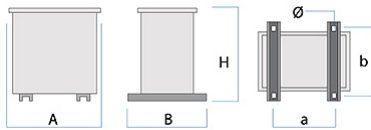

TPAP 160000 - THREE-PHASE TRANSFORMER 400/230V ±5% - ELECTROSTATIC SHIELD - 160KVA - IP21



SKU: 34558
 Référence technique: S38B55FDF1000

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
 Current : three-phase
 Certification(s) : EN 60076
 Power : 160 kVA
 Primary voltage : 400V
 Secondary voltage : 230V (Y+N)
 :
 Protection : IP21-IK08
 Version : with electrostatic shield & regulation tabs ±5%
 Inrush current : less than or equal to 7 In
 Heatings : H (IEC 60085)
 Max. ambient T° : 35°C
 No load losses : 880 W
 Load losses : 3340 W
 Voltage drop : 2 %
 UCC : 4,1 %
 Efficiency : 97,4 %

DIMENSIONS:

Dimensions (A x B x H) : 1140 x 870 x 1060 mm
 Mounting centres (a x b) : 770 x 820 mm
 Mounting diameter (Ø) : 14 mm
 Weight : 567 kg

PROTECTION(S) RECOMMANDÉE(S):

Primary 400V (aM fuse(s)) : 3 x 250A
 :
 Secondary 230V (gG fuse(s)) : 4 x 400A
 Secondary 230V (C circuit breaker(s)) : 4 x 400A

OPTIONS:

Tropicalization
 Vibration isolating mount
 Runnig wheels
 Factory assembled and wired primary and secondary protections
 Specific colour for the enclosure