





TPAP 31500 - ON REQUEST THREE-PHASE TRANSFORMER 31,5KVA - IP21



SKU: TPAP31500_Specific
Référence technique: A38B48...

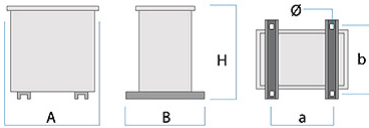

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
Current : three-phase
Certification(s) : EN 60076
Power : 31,5 kVA
Primary voltage : max. 1000V
Secondary voltage : max. 1000V
:
Protection : IP21-IK08
Version : Transformer (standard)
Inrush current : less than or equal to 7 In
Heatings : H (IEC 60085)
Max. ambient T° : 40°C
No load losses : 285 W
Load losses : 1265 W
Voltage drop : 3,9 %
UCC : 4,3 %
Efficiency : 95,3 %

DIMENSIONS:

Dimensions (A x B x H) : 610 x 470 x 770 mm
Mounting centres (a x b) : 395 x 440 mm
Mounting diameter (ø) : 11x22 mm
Weight : 158 kg

PROTECTION(S) RECOMMANDÉE(S):

:
Other voltages : N.C.

OPTIONS:

Electrostatic shield
Thermal sensors (PTC, PT100, Twin-blades)
Regulation tabs
Primary and/or secondary coupling (star, delta, zig-zag)
Dual primary
Inrush current, frequency, heating, ambient temperature, specific altitude
Tropicalization
Vibration isolating mount
Runnig wheels
Factory assembled and wired primary and secondary protections
Specific colour for the enclosure