





TPAP 630000 - ON REQUEST THREE-PHASE TRANSFORMER 630KVA - IP21



SKU: TPAP630000_Specific
 Référence technique: S38B61...

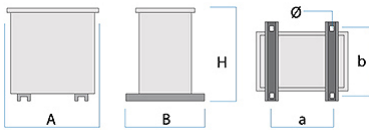

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
 Current : three-phase
 Certification(s) : EN 60076
 Power : 630 kVA
 Primary voltage : max. 1000V
 Secondary voltage : max. 1000V
 :
 Protection : IP21-IK08
 Version : Transformer (standard)
 Inrush current : less than or equal to 7 In
 Heatings : H (IEC 60085)
 Max. ambient T° : 40°C
 No load losses : 2260 W
 Load losses : 8690 W
 Voltage drop : 1,4 %
 UCC : 4,7 %
 Efficiency : 98,3 %

DIMENSIONS:

Dimensions (A x B x H) : 1350 x 1200 x 1350 mm
 Mounting centres (a x b) : 920 x 1150 mm
 Mounting diameter (Ø) : 14 mm
 Weight : 1590 kg

PROTECTION(S) RECOMMANDÉE(S):

:
 Other voltages : N.C.

OPTIONS:

Electrostatic shield
 Thermal sensors (PTC, PT100, Twin-blades)
 Regulation tabs
 Primary and/or secondary coupling (star, delta, zig-zag)
 Dual primary
 Inrush current, frequency, heating, ambient temperature, specific altitude
 Tropicalization
 Vibration isolating mount
 Runnig wheels
 Factory assembled and wired primary and secondary protections
 Specific colour for the enclosure