




TPECP 125000 - THREE-PHASE TRANSFORMER ECO-DESIGN A0AK 400/400V - 125KVA - IP21



SKU: 35545
Référence technique: S67B54FF00000

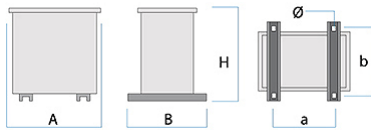

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
Current : three-phase
Certification(s) : EN 60076
Power : 125 kVA
Primary voltage : 400V
Secondary voltage : 400V (Y+N)
:
Protection : IP21-IK08
Version : économies d'énergie ECO DESIGN A0Ak
Inrush current : less than or equal to 7 In
Heatings : H (IEC 60085)
Max. ambient T° : 35°C
No load losses : 300 W
Load losses : 2140 W
Voltage drop : 1,7 %
UCC : 3,6 %
Efficiency : 98,1 %

DIMENSIONS:

Dimensions (A x B x H) : 1140 x 870 x 1060 mm
Mounting centres (a x b) : 770 x 820 mm
Mounting diameter (Ø) : 14 mm
Weight : 587 kg

PROTECTION(S) RECOMMANDÉE(S):

Primary 400V (aM fuse(s)) : 3 x 200A
:
Secondary 400V (gG fuse(s)) : 4 x 200A
Secondary 400V (C circuit breaker(s)) : 4 x 200A

OPTIONS:

Electrostatic shield
Thermal sensors (PTC, PT100, Twin-blades)
Regulation tabs
Primary and/or secondary coupling (star, delta, zig-zag)
Dual primary
Inrush current, frequency, heating, ambient temperature, specific altitude
Tropicalization
Vibration isolating mount
Runnig wheels
Factory assembled and wired primary and secondary protections

Specific colour for the enclosure