

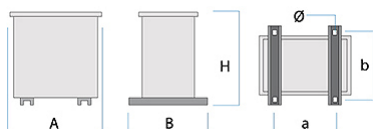




TPECP 80000 - THREE-PHASE TRANSFORMER ECO-DESIGN A0AK 400/400V - 80KVA - IP21



SKU: 35525
Référence technique: A67B52FF00000

CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer
Current : three-phase
Certification(s) : EN 60076
Power : 80 kVA
Primary voltage : 400V
Secondary voltage : 400V (Y+N)
:
Protection : IP21-IK08
Version : économies d'énergie ECO DESIGN A0Ak
Inrush current : less than or equal to 7 In
Heatings : H (IEC 60085)
Max. ambient T° : 35°C
No load losses : 230 W
Load losses : 1680 W
Voltage drop : 2,1 %
UCC : 4,2 %
Efficiency : 97,7 %

DIMENSIONS:

Dimensions (A x B x H) : 800 x 520 x 980 mm
Mounting centres (a x b) : 570 x 490 mm
Mounting diameter (ø) : 11 x 22 mm
Weight : 460 kg

PROTECTION(S) RECOMMANDÉE(S):

Primary 400V (aM fuse(s)) : 3 x 125A
:
Secondary 400V (gG fuse(s)) : 4 x 125A
Secondary 400V (C circuit breaker(s)) : 4 x 125A

OPTIONS:

Electrostatic shield
Thermal sensors (PTC, PT100, Twin-blades)
Regulation tabs
Primary and/or secondary coupling (star, delta, zig-zag)
Dual primary
Inrush current, frequency, heating, ambient temperature, specific altitude
Tropicalization
Vibration isolating mount
Runnig wheels
Factory assembled and wired primary and secondary protections

Specific colour for the enclosure