





**TPP 200 - THREE-PHASE  
TRANSFORMER 400/400V ±5% - 200VA  
- IP21**



SKU: 31227  
Référence technique: 29M22FFF0000

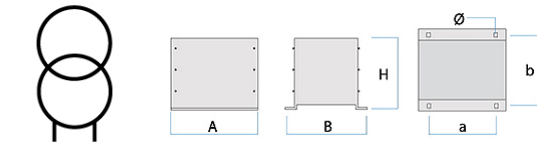

### CARACTÉRISTIQUES TECHNIQUES:

Type : Transformer  
Current : three-phase  
Certification(s) : EN 61558-2-1  
Power : 200 VA  
Primary voltage : 400V  
Secondary voltage : 400V (Y+N)  
:  
Protection : IP41-IK08  
Version : with regulation tabs ±5%  
Inrush current : less than or equal to 25 In  
Heatings : B (IEC 60085)  
Max. ambient T° : 35°C  
No load losses : 7,8 W  
Load losses : 20,9 W  
Voltage drop : 9,5 %  
UCC : 7,9 %  
Efficiency : 87,5 %

### DIMENSIONS:

Dimensions (A x B x H) : 250 x 240 x 220 mm  
Mounting centres (a x b) : 200 x 224 mm  
Mounting diameter (Ø) : 7x14 mm  
Weight : 6,3 kg

### PROTECTION(S) RECOMMANDÉE(S):

Primary 400V (aM fuse(s)) : 3 x 0,63A  
:  
Secondary 400V (gG fuse(s)) : 4 x 0,315A

### OPTIONS:

Tropicalization  
Specific colour for the enclosure